



# Keyboard of why! W253EU replace (German)

Keyboard Replacing swap after damage, or to them by a specific model.

Written By: Felice Suglia






## TOOLS:


- [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — battery pack

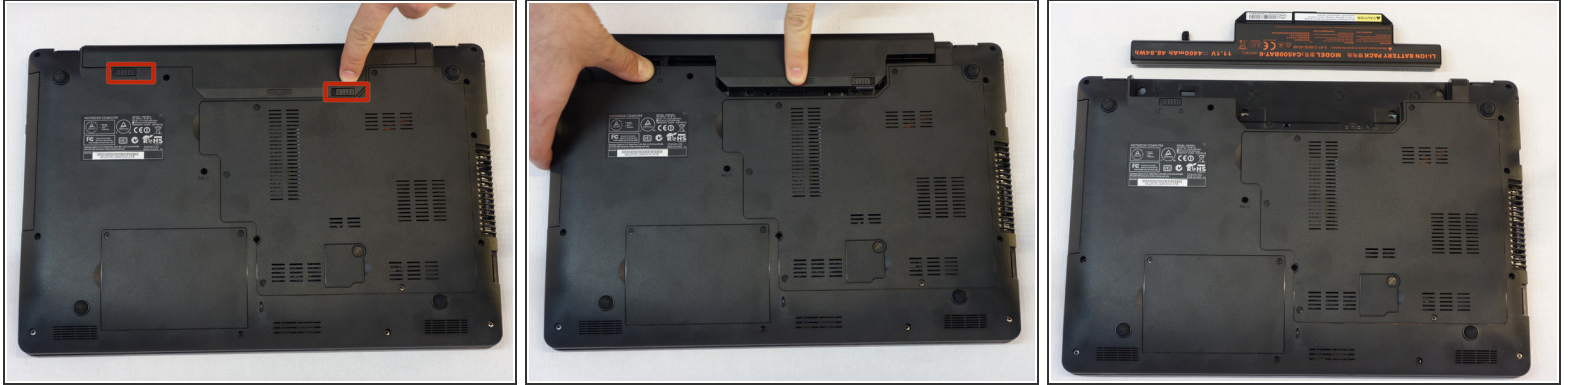

- off computer.
- Before each handle, it is important to start the expansion of the accumulator.
- bring in unlocked position slider Removing the battery.


## Step 2 — keyboard

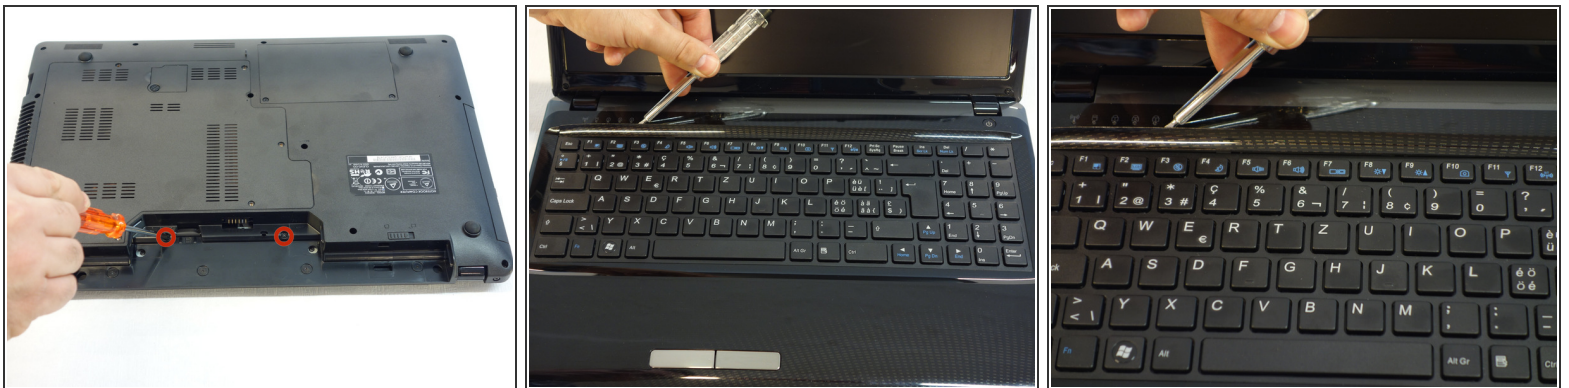

- With the screwdriver Phillips # 1, unscrew the two screws which are located in the slot of the battery going.
- Now slide a normal screwdriver into the slot of the cover there is an above the keyboard.
- Now lift the cover with the usual caution.




## Step 3

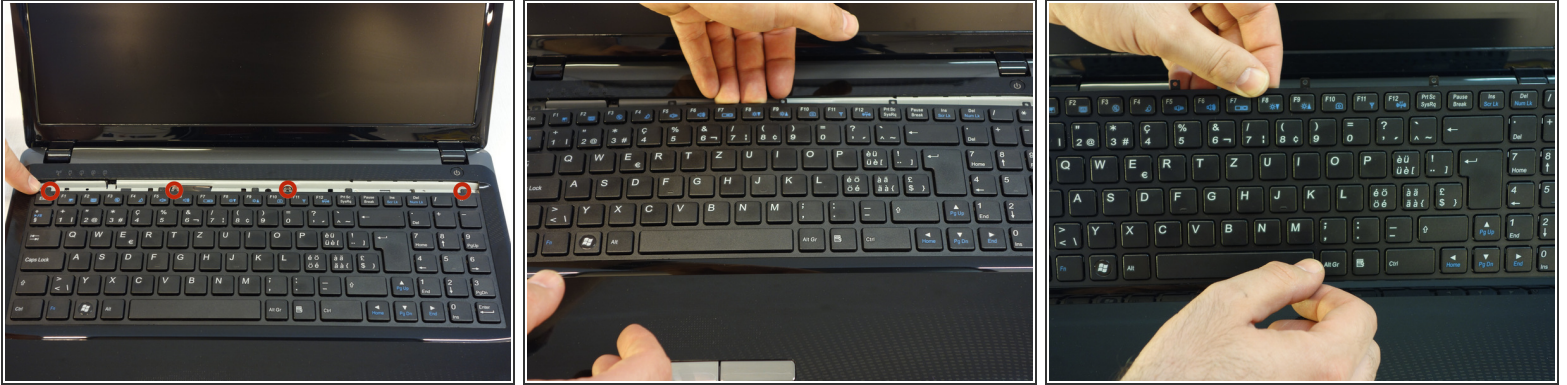

- With the screws trim Phillips # 1, you now remove the four screws that secure the keyboard in the upper part.

## Step 4

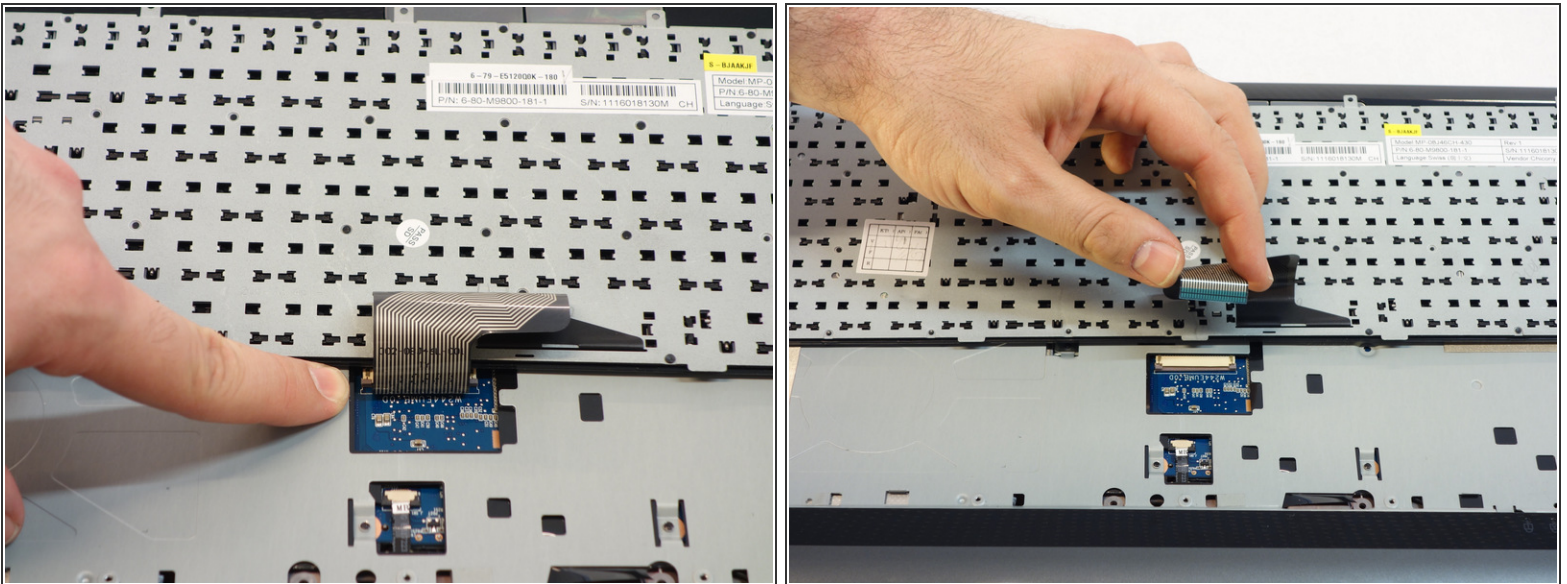

- Now turn the keyboard toward the screen to.
- Remove now carefully the connecting cord in the direction of the plug axis.

Für den Zusammenbau die Instruktionen in umgekehrter Reihenfolge ausführen.

This document was last generated on 2017-06-23 07:58:48 PM.